


CW/CWD POWER WASHERS

CW/CWD SERIES: COLD WATER, ELECTRIC MOTOR



ULTIMATE DUTY
DEPENDABLE 24/7
ALL-STAINESS

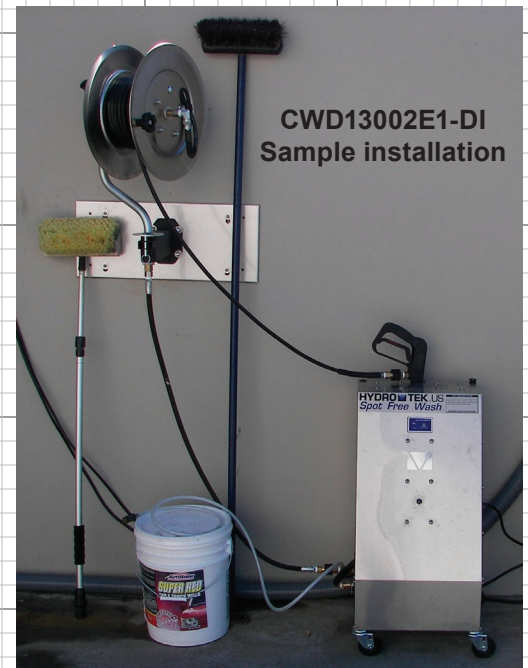

HANDY AND EFFICIENT FOR MANY FACILITY APPLICATIONS

HYDRO-TEK .US

POWER WASHER

COLD WATER - ELECTRIC, PORTABLE / STATIONARY / WALL MOUNT

CW/CWD
SERIES

Common Features

■ Stainless Steel Construction:

Made with rust-proof and sanitary stainless steel, ideal for use in sterile food processing plants or harsh environments.

■ Industrial Duty Pump:

Industrial triplex ceramic plunger pumps exhibit long lasting performance eliminating downtime and reducing routine maintenance.

■ Front Mounted Controls:

Front mounted controls for easy access and quick adjustments for multiple cleaning applications.

■ Downstream Soap Injection:

Soaps and chemicals are introduced after the pump eliminating the risk of pump damage. Soap selection & volume controlled from the panel mounted soap knob, and activated from the gun without returning to the machine. Wand controlled soap not available on CWD13002E1, uses knob only.

■ More Standard Features:

- High efficiency electric motors ■
- Heavy duty hose, wand, trigger gun, and quick connect nozzles ■

CW Belt Drive Models

■ High Temperature Inlet Water Compatibility:

The CW models are system engineered to allow using hot water up to 160°F from a water heater or other hot water source. For tougher applications an optional hot seal kit will allow inlet water up to 190°F, exceeding typical food processing sanitation requirements. Unit shuts off automatically if temperature rating is exceeded, protecting pump from heat damage.

■ Versatile Portability or Mounting Options:

The CW's unique design allows you to choose to install a wheel kit for portability or choose to mount unit to the wall in a convenient stationary location with the integrated rear bolt keyholes in the chassis design.

■ Water Tight Electrical Enclosure NEMA 4:

ETL certified to UL1776 Class 2, for use in wash-down area, exceeding industry standards. Electrical box features an hour meter and instant access to the electronics.

■ Auto On/Off with Adjustable Time Delay Shutdown:

Operator has total control over the system from the spray wand including pressure adjustment. This added convenience saves electricity, time, and effort while reducing pump wear.

CWD Direct Drive Models

■ Compact and Portable Design:

CWD models include caster wheels to move the pressure washer right where you need it or push it up against a wall out of your way. Built in soap container storage rack (not on -DI model).

■ DI Spot Free Model (CWD13002E1-DI):


The Hydro Tek spot free washers include built-in housings for the DI filters to make it more compact and portable than others on the market. A stainless steel frame encloses and protects the filter housings, pump, and motor. Simply insert a Hydro Tek filter pack to remove the impurities from tap water for a spot free finish without having to dry the surface. Quick read meter ■ monitors the water quality to let you know when it is time to change the filters. System designed to conserve water flow and increase filter life.

The Hydro Tek Spot Free Advantage...

- Compact integrated filter housing
- On-demand DI water: no more bottle leases, bulky bottle storage, or running out of pre-purchased DI water
- Ideal for auto, RV, boat, bus, truck, or window washing.
- Hydro Tek DI filter packs have a high yield and produce ultra pure water. (Treats up to 1000 gallons to a purity of 5ppm or better in average tests, when inlet TDS is 150ppm or less)



CWD Spot Free model shown

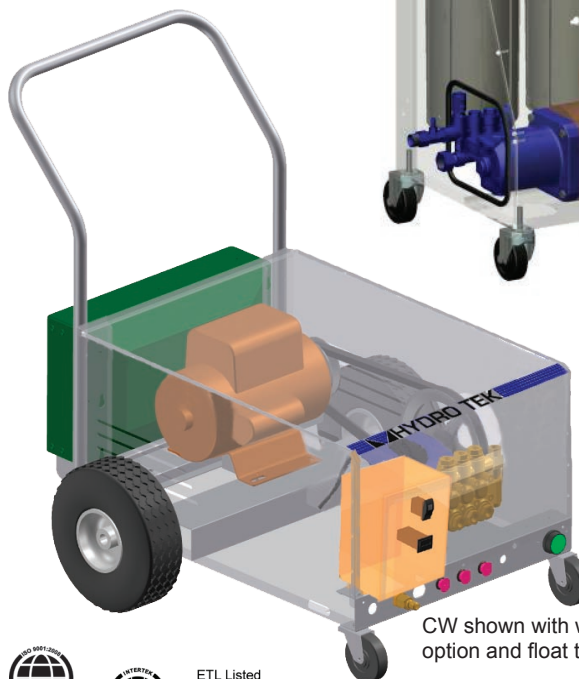

CW shown with wheel kit option and float tank option



ETL Listed
Certified to UL-1776
Certified to
CAN / CSA B140.11

Specifications

Model	PSI	GPM	Inlet Water Temp.	HP	Voltage
CWD13002E1	1300	2.0	cold	2	115v - 1ph - 15a
CWD13002E1-DI			(De-ionized water version of CWD13002E1)		
CWD22004E2	2200	3.5	cold	5	208/230v - 1ph
CW12003E1	1200	2.5	*up to 190°	2	115v - 1ph, 20a
CW21004E2	2100	4.0	*up to 190°	6.5	230v - 1ph
CW21004E3	2100	4.3	*up to 190°	7.5	208/230v - 3ph
CW21004E4	2100	4.3	*up to 190°	7.5	460v - 3ph
CW35005E3	3500	4.3	*up to 190°	10	208/230v - 3ph
CW35005E4	3500	4.3	*up to 190°	10	460v - 3ph

*with hot seal kit option

Specifications may vary, consult factory for custom models

Dimensions (LxWxH): CW models 28"x21"x14" (39"x29½"x36" with wheel kit)
CWD1300 16"x17"x32", CWD2200 16"x20"x32"

Optional Accessories...

Wall mount hose reel

CW model options: Multi-station outlets, wall mount remote, wheel/handle kit, wall-mount brackets, hot seal kit, float tank/inlet soap injection
CWD12002E1-DI: DI resin filter pack (required, not included)

DISTRIBUTED BY:

HYDRO TEK .US
CLEANING EQUIPMENT MFG.

2353 Almond Avenue Redlands CA 92374
800.274.9376 fx909.799.9888 www.hydrotek.us

CW/CWD Series rev 02/13 Hydro Tek ©